



BRC-562E

Platform high-speed computer interlock sewing machine

[Parameter consultation](#)

[Platen Manual](#)


Automatic thread trimming, saving people and lines

The operation is simple, easy to learn and easy to use, and it can be quickly operated by novices, eliminating the need for thread trimmers and improving production efficiency by 40%. The length of the thread after trimming can be adjusted according to the requirements to save the amount of suture



Automatic dialing, more beautiful stitches

Equipped for the "two needles and three threads" mode. Automatic thread-pulling replaces manual operation to avoid thread removal when stitching again, and the stitches are more beautiful.

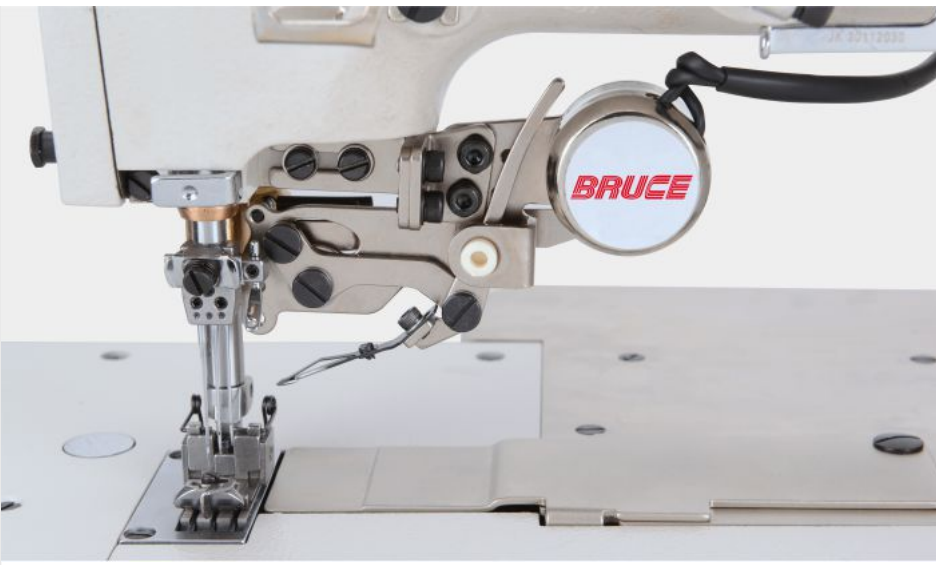

Automatic presser foot lifting, efficient and labor-saving

Automatically lift the presser foot instead of manual, improve work efficiency while reducing labor intensity.




The threading cam is external, easy to use







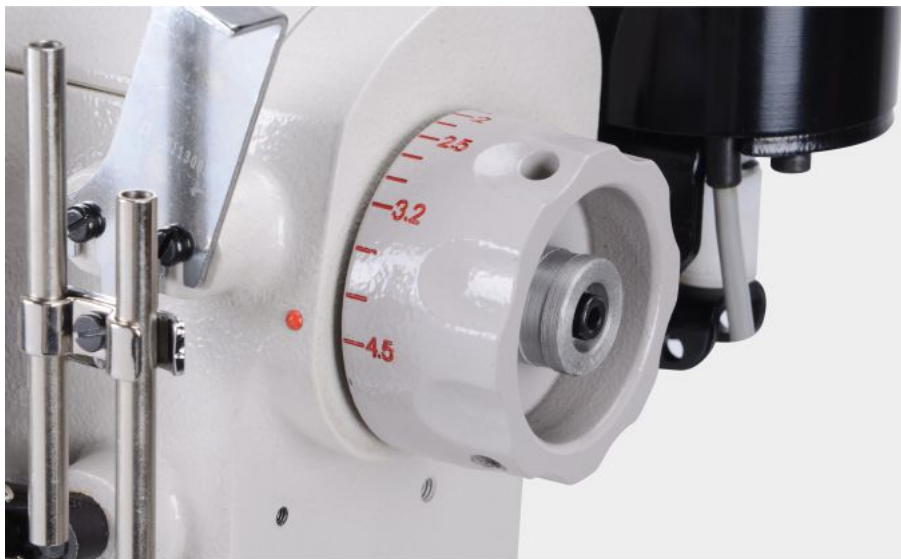





The threading cam is external and easy to thread. Broken wire winding, easy to solve.

Pin length adjustment, convenient and fast

Button design, press the button by hand, rotate the hand wheel to complete the length adjustment. The operation is simple, of course one step faster.



Detailed product parameters

											
								(mm)	(S.p.m)	(mm)	(kg)
BRC-562E-01GB/UT(UT2)	基本缝 Plain seaming	UY128GAS 11-14#	3 5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64	
BRC-562E-02BB/UT(UT2)	滚领缝 Tape binding	UY128GAS 11-14#	3 5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64	
BRC-562E-03DB/UT(UT2)	盖缝 Covering stitch	UY128GAS 11-14#	3 5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64	
BRC-562E-08AC/UT(UT2)	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3 5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64	
BRC-562ADI-01GB	基本缝 Plain seaming	UY128GAS 11-14#	3 5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58	
BRC-562ADI-02BB	滚领缝 Tape binding	UY128GAS 11-14#	3 5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58	
BRC-562ADI-03DB	盖缝 Covering stitch	UY128GAS 11-14#	3 5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58	
BRC-562ADI-05CB	缝松紧带(右刀) Elastic lace attaching(right-side cutter)	UY128GAS 11-14#	3 5	1.5-4.5	5.6/6.4	0.65-1.3	5	4000	670×445×595	48/58	
BRC-562ADI-07CB	缝松紧带 Elastic lace attaching	UY128GAS 11-14#	3 5	1.5-4.5	5.6/6.4	0.65-1.3	5	4000	670×445×595	48/58	
BRC-562ADI-08AC	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3 5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58	
BRC-562ADI-23GB	基本缝(大针距) Plain seaming(Large stitch length)	UY128GAS 11-14#	3 5	6	5.6/6.4	0.65-1	6.2	4000	670×445×595	48/58	
BRC-562ADI-23BB	滚领缝(大针距) Tape binding(Large stitch length)	UY128GAS 11-14#	3 5	6	5.6/6.4	0.65-1	6.2	4000	670×445×595	48/58	
BRC-562ADI-23GBL	基本缝(超大针距) Plain seaming(Extra large stitch length)	UY128GAS 11-14#	2 4	7-7.5	5.6/6.4	1	6.2	4000	670×445×595	48/58	
BRC-562ADI-23BBL	滚领缝(超大针距) Tape binding(Extra large stitch length)	UY128GAS 11-14#	2 4	7-7.5	5.6/6.4	1	6.2	4000	670×445×595	48/58	

注 (Note) :

UT代表电脑; UT2代表电脑, 不含上剪线刀; DI代表直驱。

UT: computerized type (auto presser foot lifter, auto trimming) ; Ut2: computerized type without upper cutter; DI : direct drive type