


BRUCE 布鲁斯


BRC-
664BDII

小方头式高速电脑绷缝机

High Speed Computerized Cylinder-bed Interlock Machine

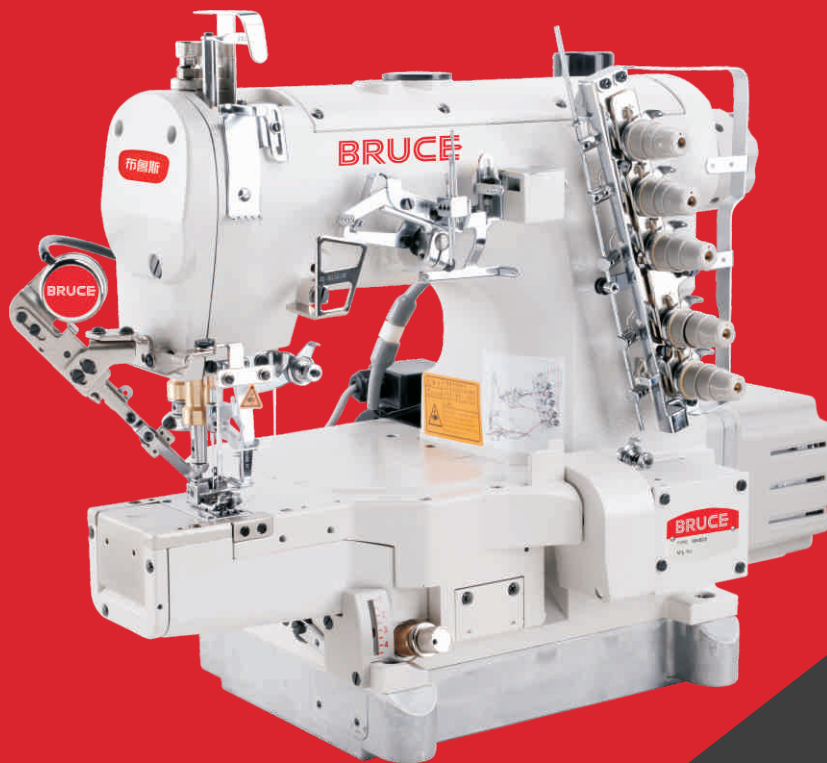


怕跳针 · 怕断线 · 就用布鲁斯
NO BREAK · NO SKIP

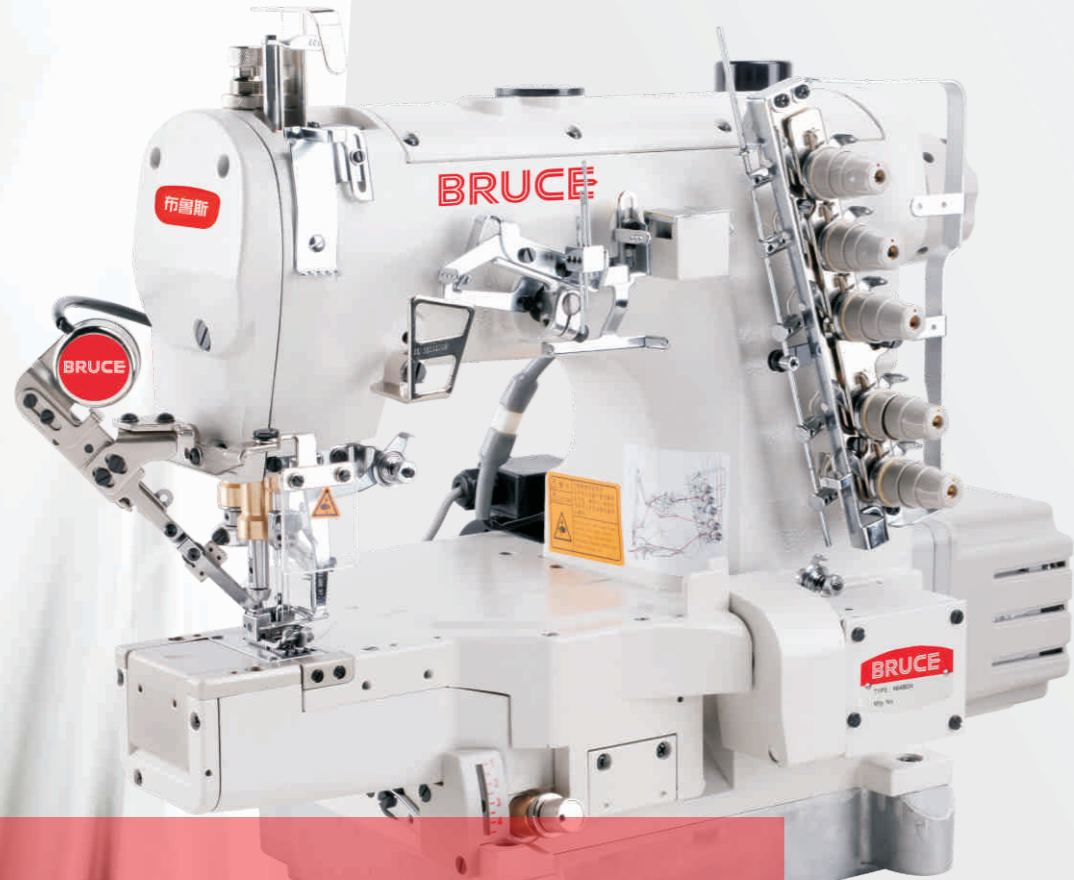

怕跳针 · 怕断线 · 就用布鲁斯
NO BREAK · NO SKIP


BRC-664BDII

品名：小方头式高速电脑绷缝机
High Speed Computerized Cylinder-bed Interlock Machine

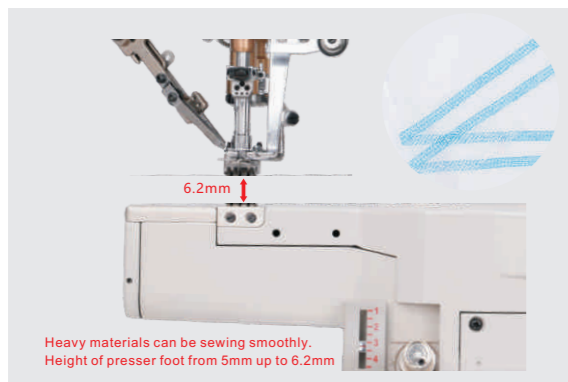


薄厚通吃，一机多用

For light and heavy material, one machine with multi functions
进一步扩大缝制范围，网纱、卫衣过骨等不同厚度面料都能轻松缝制。
Wide range of applications, suitable for various of fabrics like yarn and sweater.

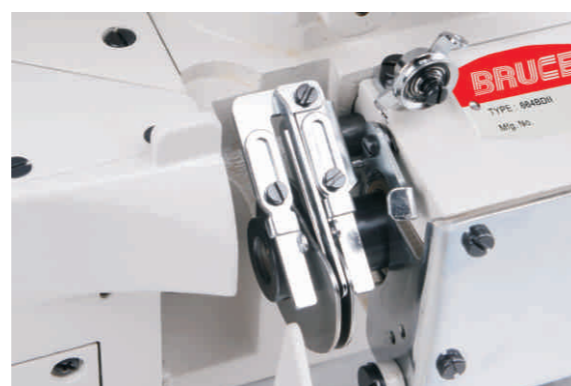


打线凸轮外置，简单易用

Out-moved thread cam, easy operation
打线凸轮外置，轻松穿线。打线凸轮绕线，轻松解决。
Out-moved thread cam makes threading and cleaning easily.

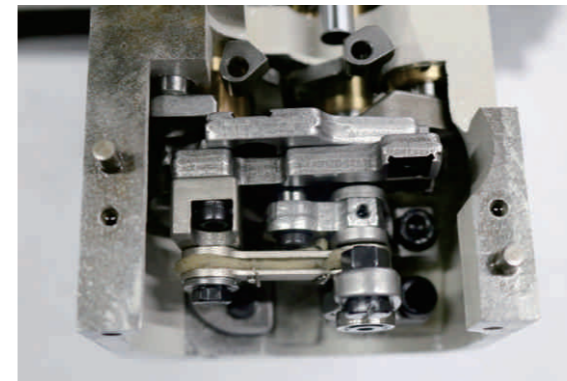


牙架新设计，不跳针不断线

New design of feeding dog holder, avoid needle breaking and stitch skipping
牙架结构创新设计，性能更稳定，线迹更美观，有效防止跳针断线问题。
New design of feed dog holder makes functions more stable and stitch more beautiful. Avoid of needle breaking and stitch skipping.

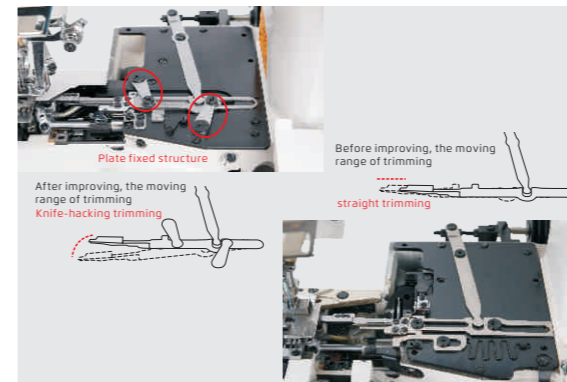


重置刀盘结构，剪线更精准

Reset cutter structure, accurate thread trimming
刀盘特殊设计，剪线更精准：剪线机构创新设计，性能更稳定，采用砍刀式结构，剪线更精准。
Special knife plate makes trimming more accurate. New design of trimming structure makes trimming more stable. Knife-hacking trimming guarantees trimming precision.

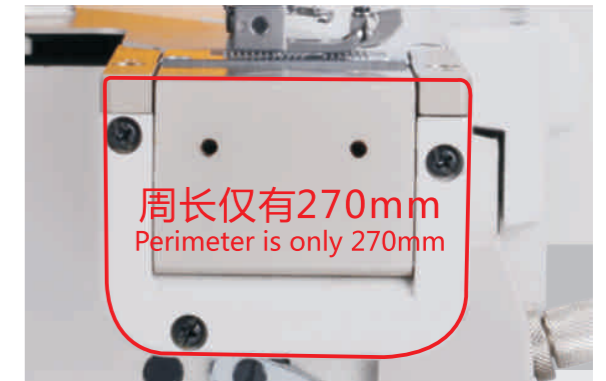

缝台小，方便送料

Small cylinder bed, easy to feed
周长仅270MM，头部缩短设计，更容易送料，效率更高。
Perimeter is only 270mm; shorter bed design; Easy to feed, high efficiency.

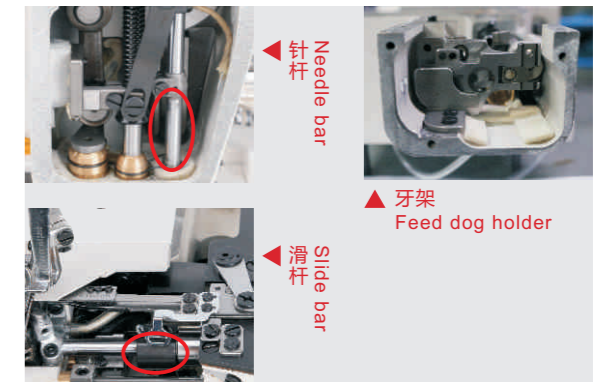

三重机构强制回油，成品无污染

Triple mechanisms make oil return forcibly, protect the fabric from oil pollution
针杆不漏油，牙架不甩油，滑杆不喷油。
Needle bar does not leak oil; Feed dog holder does not spit oil; Slide bar does not squirt oil.

技术参数 Specification

BRC-664BDII-01GB/UT(UT2)	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500	680×420×630	52/62			
BRC-664BDII-03GB/UT(UT2)	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500	680×420×630	52/62			
BRC-664BDII-08AC/UT(UT2)	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500	680×420×630	52/62			
BRC-664BDII-35AC/UT(UT2)	下摆折边缝(左刀) Bottom hemming(left-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	680×420×750	53/65			
BRC-664BDI-01GB	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500	630×390×630	46/56			
BRC-664BDI-02BB	滚领缝 Tape binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500	630×390×630	46/56			
BRC-664BDI-03GB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500	630×390×630	46/56			
BRC-664BDI-08AC	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500	630×390×630	46/56			
BRC-664BDI-35AC	下摆折边缝(左刀) Bottom hemming(left-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	630×390×750	47/59			

注 (Note) :

UT代表电脑; UT2代表电脑, 不含上剪线刀; DI代表直驱; UTL气动款可选配。

UT: computerized type; UT2: computerized type without upper cutter; DI: direct drive type; UTL: pneumatic type is optional.

BRUCE 布鲁斯

400-8890-100
www.chinabruce.cn



台州市布鲁斯缝制设备有限公司
TaiZhou Bruce Sewing Machine Co.,Ltd.

浙江省台州市椒江区东海大道东段1008号2号楼
No.2 building No.1008 Eastern Section East Sea Road Jiaojiang
District Taizhou ,Zhejiang.